


Dimension: (Unit: mm)

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.17		兼容57机座安装	王洪松
V2.0	21.05.31		凸台改为1.8	王洪松

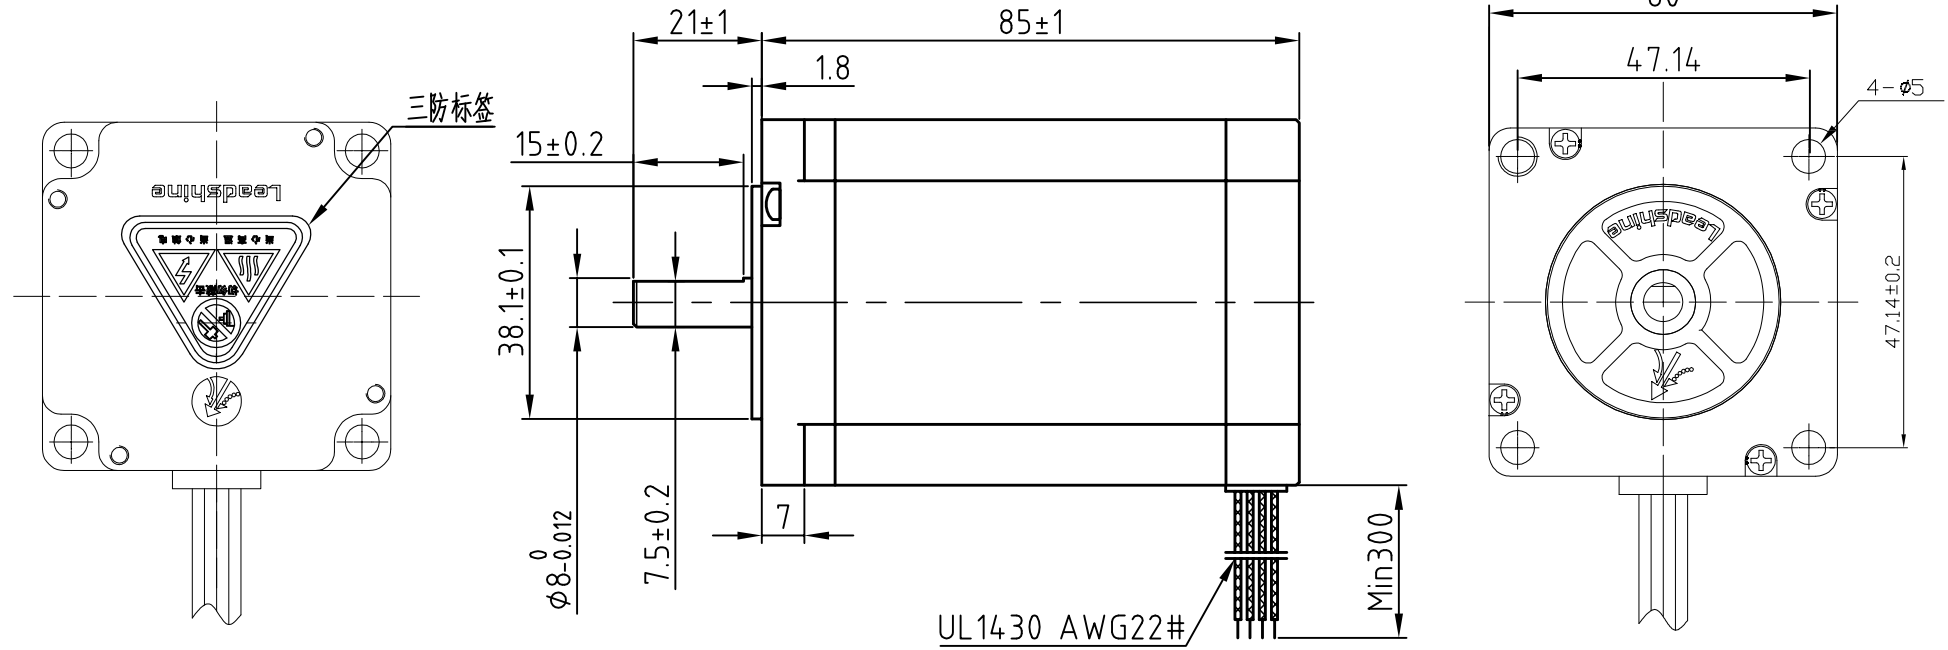


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	1.56 V
DC Resistance/phase ±10%	0.62 Ω
Inductance/phase ±20%	2.8 mH
Holding torque	3.1 N·M
Inertia	0.84 kg·cm ²
Weight	1.4kg

Motor Connctions:

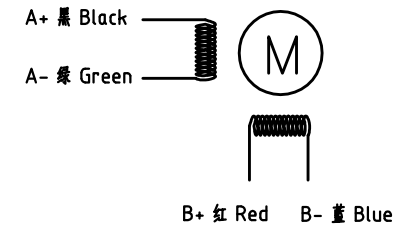

设计 Designed	王洪松	日期 Date	2020.04.17	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2020.04.17	第一角画法 First Angle projection	名称 Title	混合式步进电机
批准 Approved	黄捷建	2020.04.17	版本/版次 Scale	阶段标记 Stage Mark	D57CM31-4A MS20
料号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	LS-D57CM31-4A MS20	