



版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.02.12		初版	王洪松

Dimension: (Unit: mm)

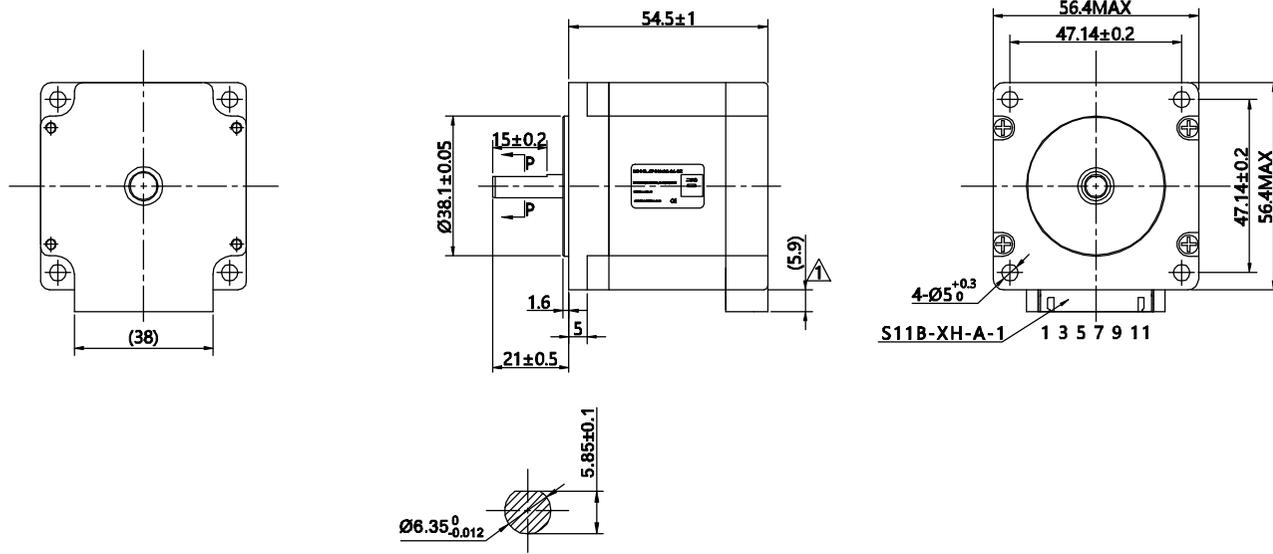

**Common Rating**

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

**Specification:**

Current/phase	3.0A
Voltage	2.4 V
DC Resistance/phase ±10%	0.8 Ω
Inductance/phase ±20%	2.8
Holding torque	1.3 N·M
Detent torque	0.068 N·M
Inertia	0.30 kg·cm <sup>2</sup>
Weight	0.7 kg

设计 Designed	王洪松	日期 Date	2020.02.12	材料 Material	版本: A/01	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
审核 Checked	黄捷建	2020.02.12		第一角画法 First Angle projection		名称 Title	混合式步进电机
批准 Approved	黄捷建	2020.02.12		重量Weight	比例Scale	阶段标记 Stage Mark	57CM12C-3A-CZ
零件编号 Part No.	LS-MT-01-07A			共 1 页 第 1 页	Sheet 1 of 1	图号 DWG. NO.	LS-57CM12C-CZ