


573S15 3-PHASE HYBRID STEPPING MOTOR

specifications:


| MODEL | PHASE | STEP ANGLE | RATED VOLTAGE | LINE CURRENT | RESISTANCE /PHASE | INDUCTANCE /PHASE | HOLDING TORQUE | DETENT TORQUE | ROTOR INERTIA | WEIGHT |
|-------|-------|------------|---------------|--------------|-------------------|-------------------|----------------|---------------|-------------------|--------|
| | | DEG/STEP | V | A | ohms | mH | N.m | N.cm | g.cm ² | Kg |
| | 3 | 1.2 | 4.47 | 5.2 | 0.86 | 2 | 1.5 | 6.8Max | 480 | 1.1 |

Wiring Diagram:

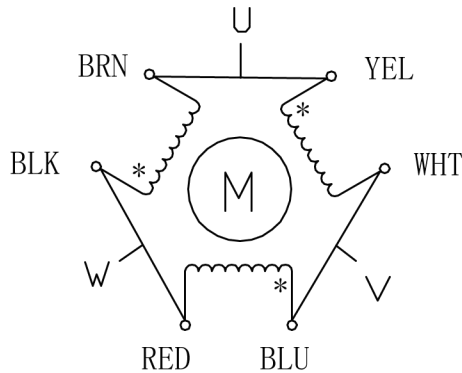

UL1332 AWG22# LENGTH: 400mm

Dimension:

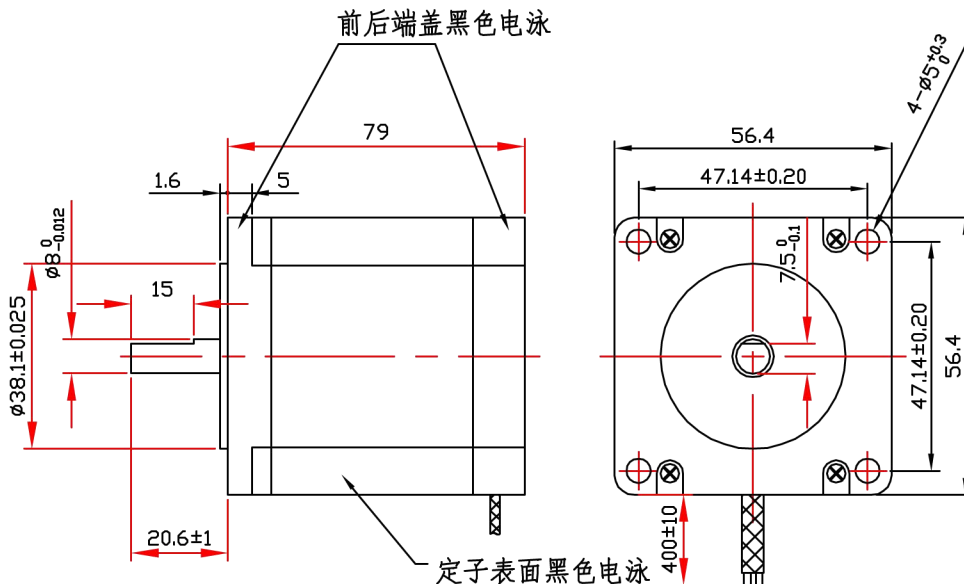

| | | | | | | | | | | |
|--|----------|-------------|-----|-------|------------|------------------------|-----------------|-------|--|-----|
| C | 100715gy | 改为骨架绕线 | | | | | | | | |
| B | 080506gy | 新开模定子冲片 | | | | | | | | |
| A | 080131L2 | 表面处理由黑塑到电泳 | LN | JOHN | 2008.01.31 | DRAWN | DATE | TITLE | | |
| REV | ECN NO. | DESCRIPTION | DRN | APP'D | DATE | SPECIFICATIONS | | | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: | | | | | | CHECK | USED ON | | | |
| DECIMALS: .X ±0.5 | | | | | | APP'D | 573S15 | | | REV |
| ANGULAR: .XX ±0.25 | | | | | | | DWG NO. | | | C |
| .XXX ±0.1 | | | | | | SCALE | 深圳市雷赛智能控制股份有限公司 | | | |
| DO NOT SCALE DRAWING | | | | | | SHEET | OF | | | |
| MATERIAL | | | | | | THIRD ANGLE PROJECTION | | | | |